


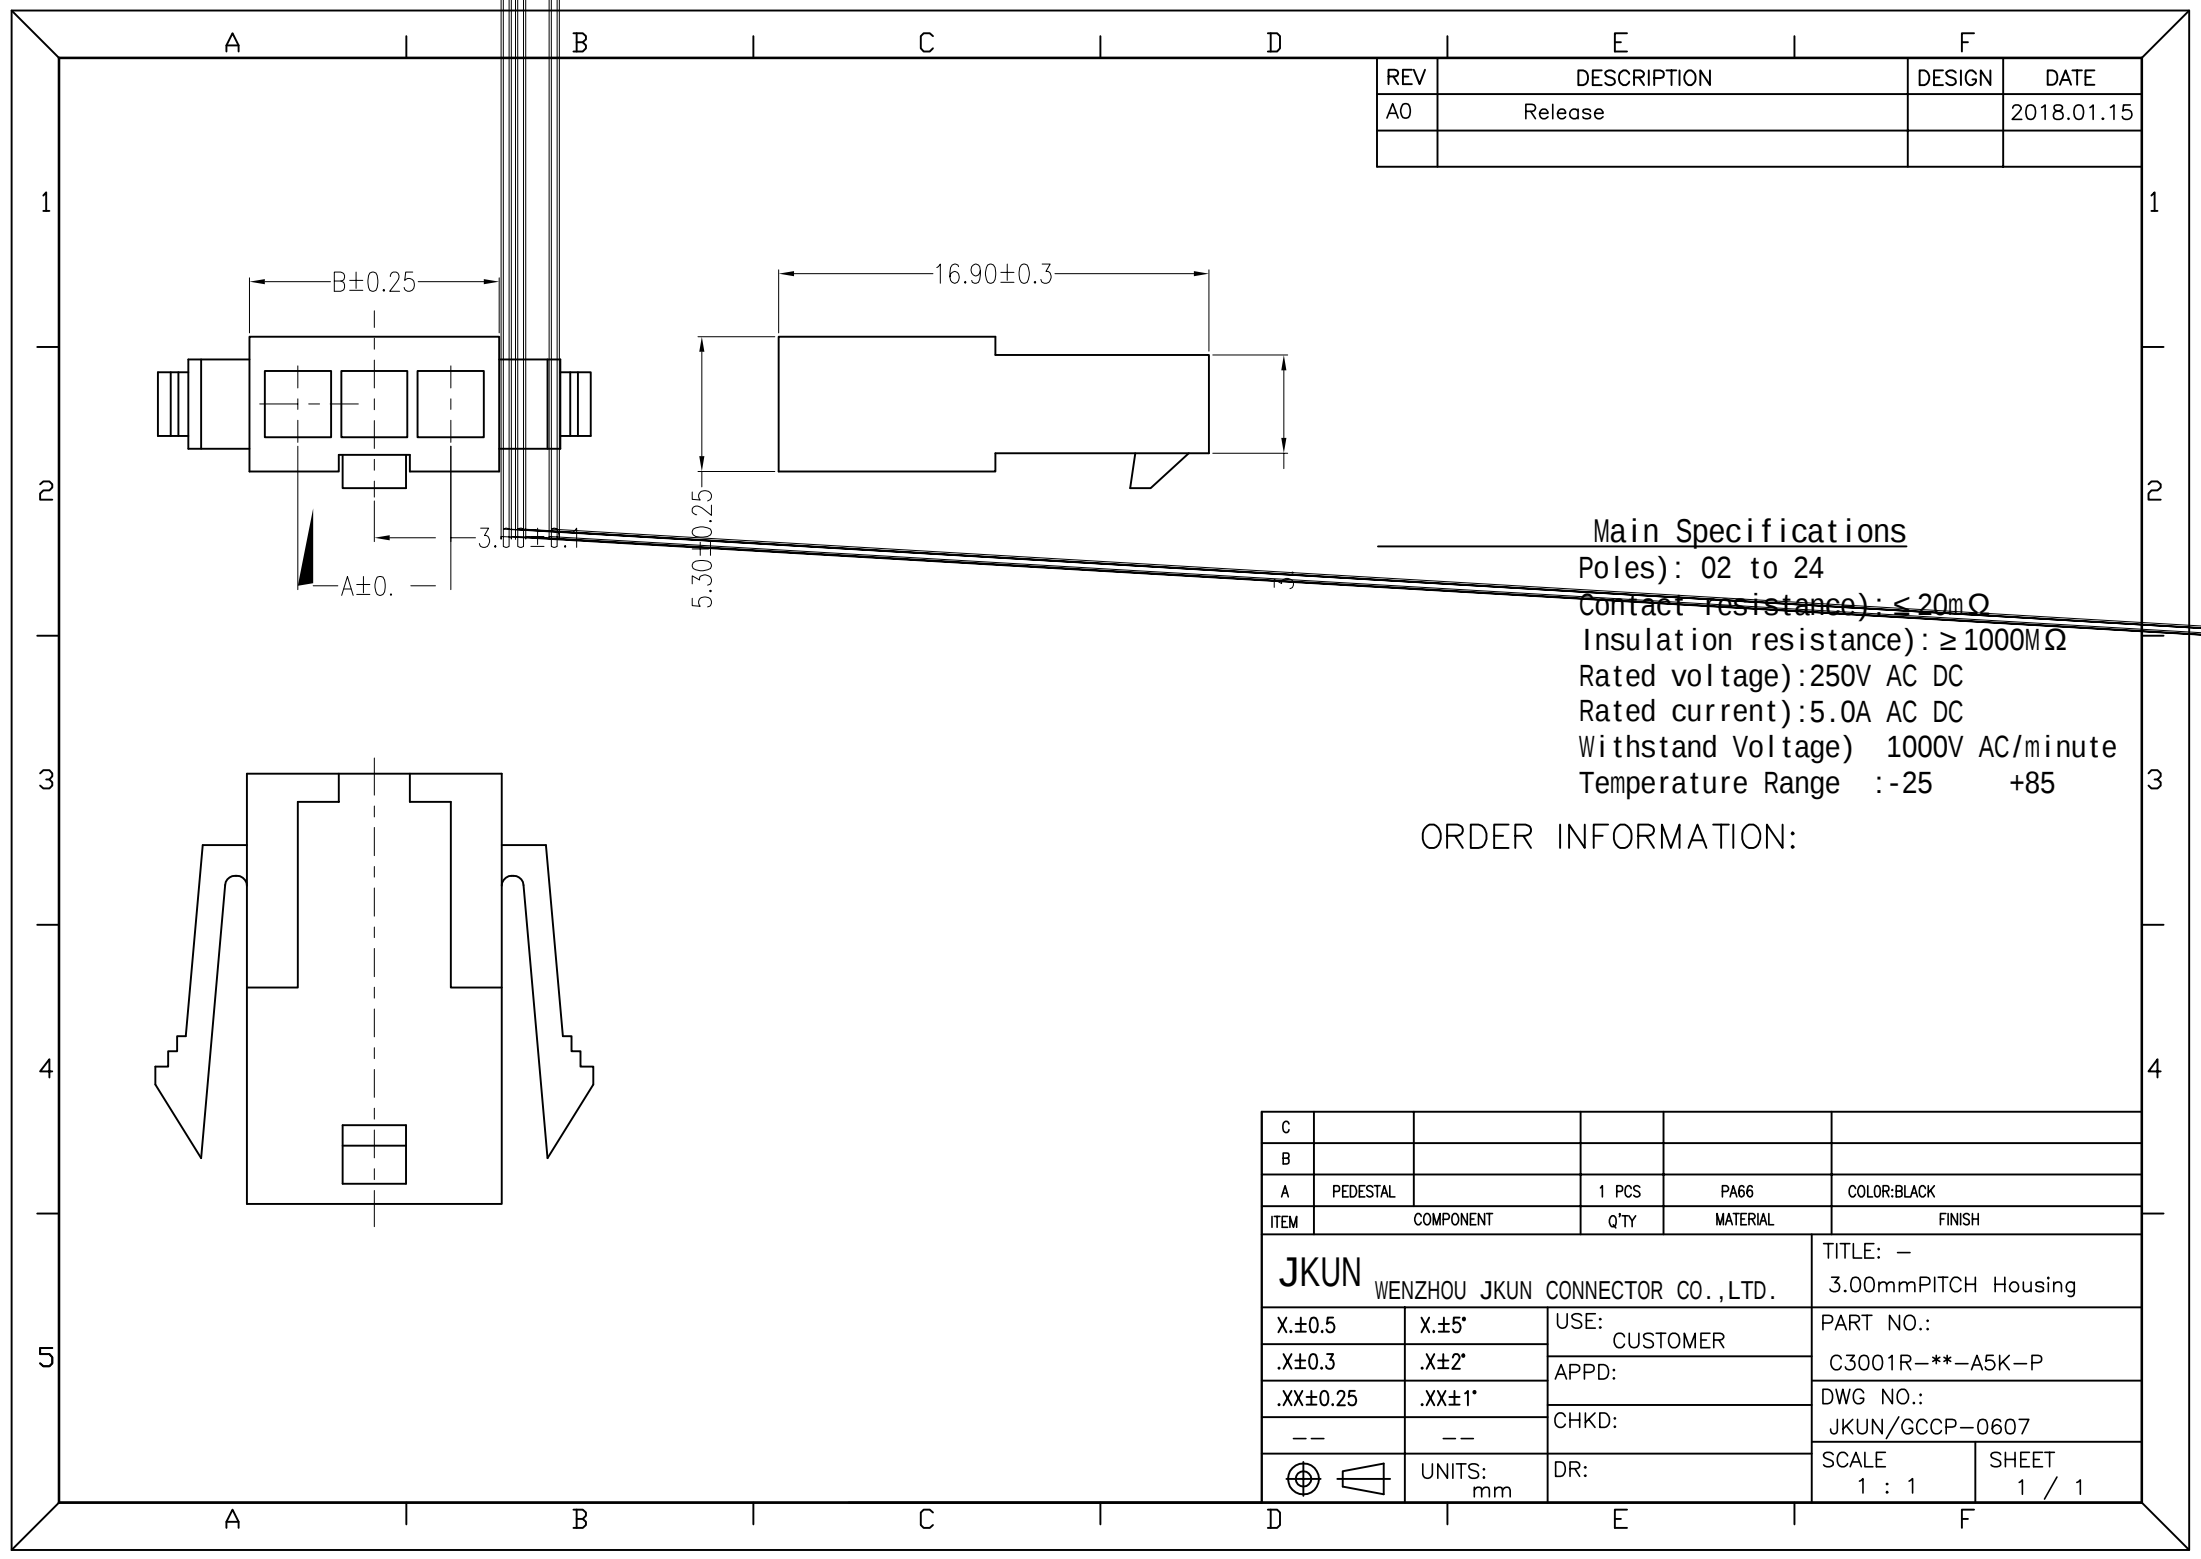


REV	DESCRIPTION	DESIGN	DATE
A0	Release		2018.01.15

Main Specifications

Poles): 02 to 24
Contact resistance): $\leq 20m\Omega$
Insulation resistance): $\geq 1000M\Omega$
Rated voltage): 250V AC DC
Rated current): 5.0A AC DC
Withstand Voltage) 1000V AC/minute
Temperature Range : -25 +85

ORDER INFORMATION:

C					
B					
A	PEDESTAL		1 PCS	PA66	COLOR:BLACK
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
JKUN WENZHOU JKUN CONNECTOR CO.,LTD.				TITLE: — 3.00mmPITCH Housing	
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2°			C3001R-**-A5K-P	
.XX±0.25	.XX±1°	APPD:		DWG NO.:	
--	--			CHKD:	
		UNITS: mm		DR:	
				SCALE 1 : 1	SHEET 1 / 1