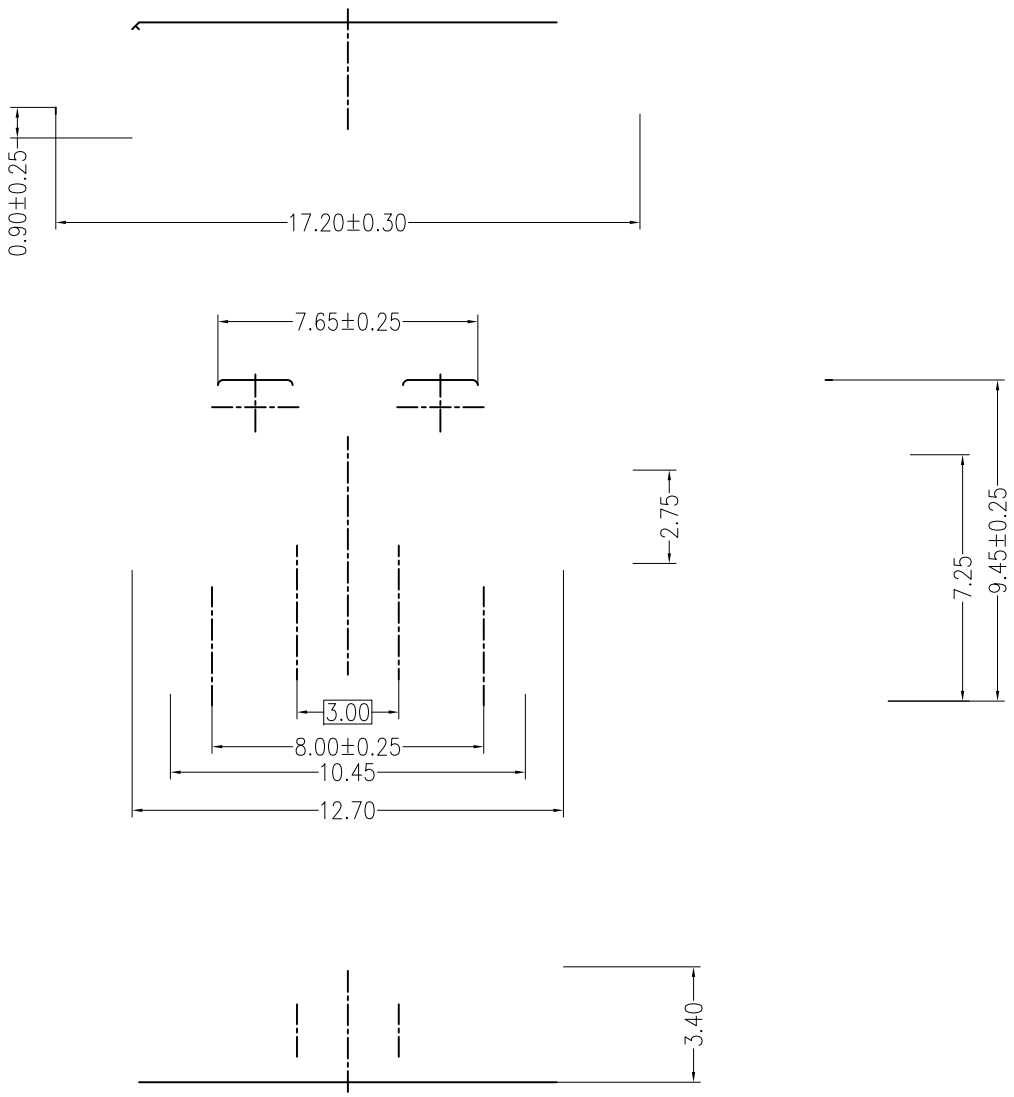

Specifications:
Contact resistance:≤30mΩ
Insulation resistance:⩾1000MΩ
Rated voltage:200V AC DC
Rated current:1.0A AC DC
Withstand Voltage: 1000V AC/minute
Temperature Range:−25℃～ +105℃
Housing:LCP UL94V−0,BEIGE
Contacts:PhosphorBronze/MATTE Sn

P.C.B LAYOUT

GENERAL TOLERANCE