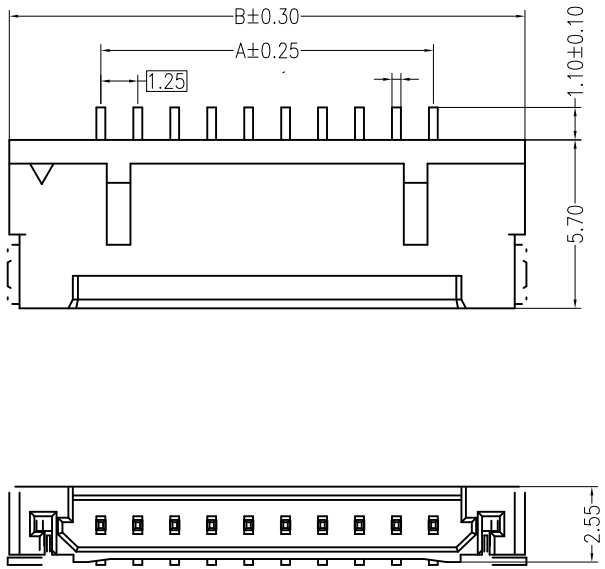

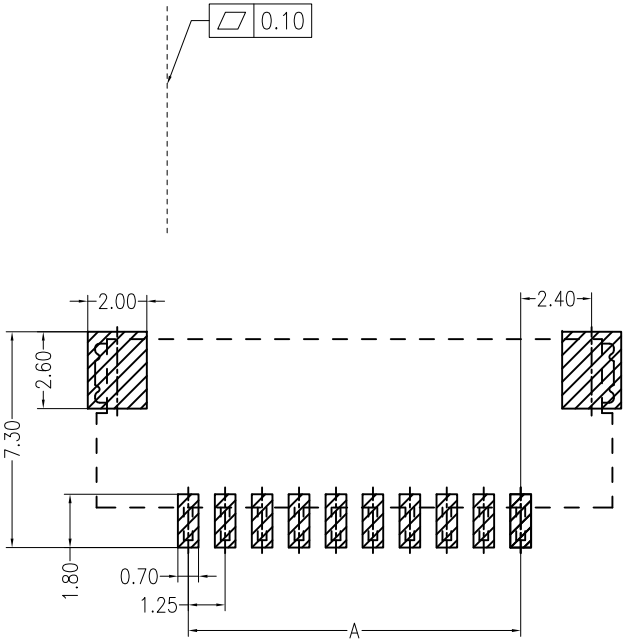

PCB LAYOUT(Tolerance:±0.05)

Specifications:
- Poles: 2 to 30
- Contact resistance:≤30mΩ
- Insulation resistance:≥500MΩ
- Rated voltage:150V AC DC
- Rated current:1A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range:-25℃~ +85℃
- Housing:PA9T UL94V-0,Natural
- Contacts:Brass/ MATTE Sn-plated
- Solder tabs:Brass/MATTE Sn-plated

JKUN WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE:
GENERAL TOLERANCE		USE:	PART NO.:
X. ±0.50	X. ±5°	APPD:	
X.X ±0.30	X.X ±2°	CHKD:	DWG NO.:
X.XX ±0.20	X.XX ±1°		
	UNITS: mm	DR: FangSongLe	SCALE / SHEET