Specifications:

Contact resistance:≤20mΩ
Insulation resistance:≥1000MΩ
Rated voltage:125V AC DC
Rated current:2.0A AC DC
Withstand voltage:500V AC/minute
Temperature range:−40℃～ +120℃
Housing:LCP,UL94V−0,Natural
Contacts:PhosphorBronze/Matte Sn
Solder tabs:Brass/Matte Sn

ORDER INFORMATION:

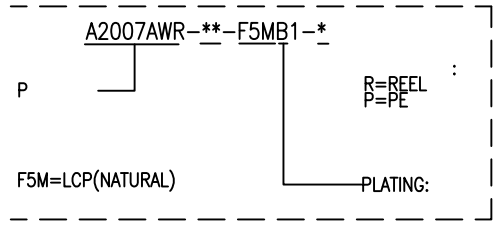

GENERAL T