Specifications:

Poles: 02

Contact resistance:≤20mΩ

Insulation resistance:≥1000MΩ

Rated voltage:250V AC DC

Rated current:2.0A AC DC

Withstand Voltage: 2000V AC/minute

Temperature Range:−40℃～ +110℃

Housing:PA46 UL94V−0,Natural(Beige)

Contacts:Brass/Ni-q
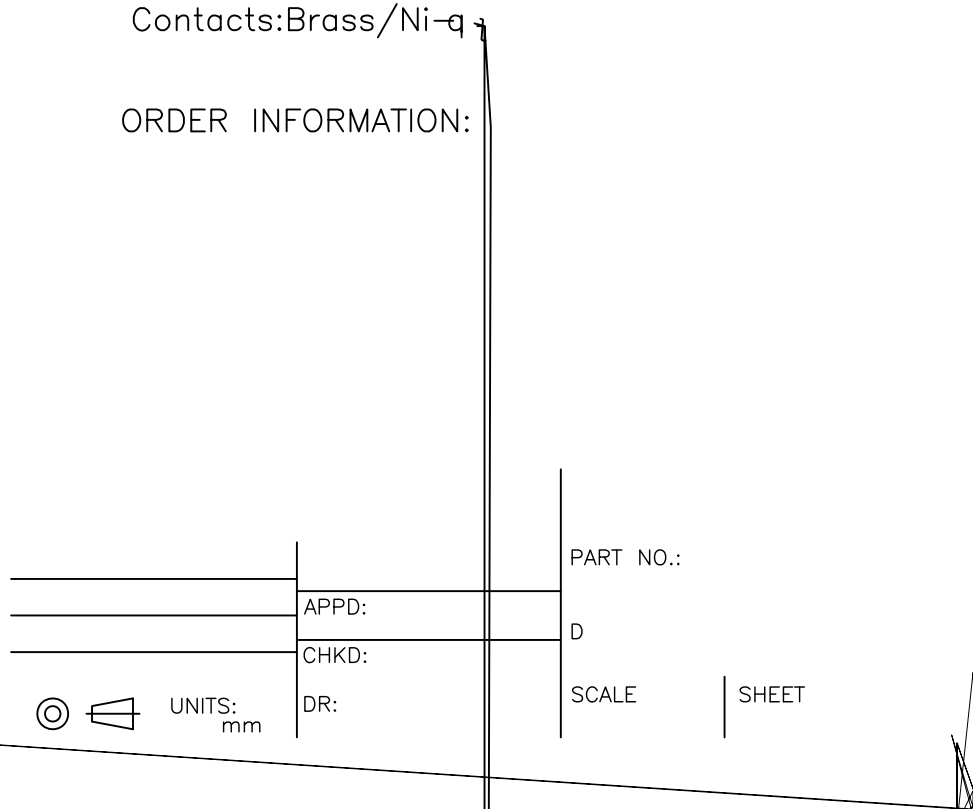
ORDER INFORMATION: