吴丹平

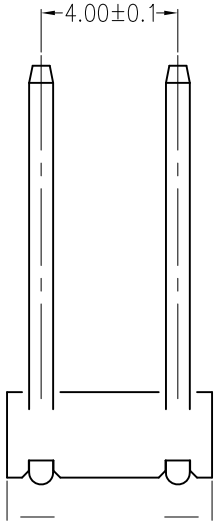

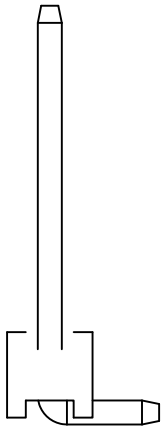



Specifications:

Poles: 02
Contact resistance:≤20mΩ
Insulation resistance:≥1000MΩ
Rated voltage:250V AC DC
Rated current:2.0A AC DC
Withstand Voltage: 2000V AC/minute
Temperature Range:−40℃～ +110℃
Housing:PA46 UL94V−0,Natural(Beige)
Contacts:Brass/Ni-q

ORDER INFORMATION:

L019−02−B1MG−P

PART No.
No.FOR CIRCUITS:
02
PLASTIC MATERIAL:
B1M=PA46(BEIGE)
PACKAGING:
P=PE
PLATING:
G=Ni

		PART NO.:	
	APPD:	D	
	CHKD:		
UNITS: mm	DR:	SCALE	SHEET