

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 1000\text{M}\Omega$

Rated voltage: 1

ORDER INFORMATION:

Specifications:

Contact resistance $\leq 20\text{m}\Omega$

Insulation resistance $\geq 1000\text{M}\Omega$

Rated voltage AC DC

Rated current AC DC

Withstand voltage 100V AC/minute

Temperature range $25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Housing: LCP, UL94V-0, Natural

ORDER INFORMATION:

	C		Brass	Sn-plated
	PEDESTAL	1 PCS	PA66	UL 94V-0, COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

A

B

C

D

E

F

1

1

2

2

3

3

4


4

5

Main Specifications

Poles): 02 to 18
 Contact resistance): 20m
 Insulation resistance): 1000M
 Rated voltage): 250V AC DC
 Rated current): 3.0A AC DC
 Withstand Voltage) 1000V AC/minute
 Temperature Range : -25 +85

C					
B	CONTACT		02~18 PCS	Brass	Sn-plated
A	PEDESTAL		1 PCS	PA66	UL 94V-0, COLOR:WHITE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
				USE:	TITLE:
				APPD:	PART NO.:
				CHKD:	DWG NO.:
				DR:	SCALE
					SHEET



UNITS:
mm

A

B




C




D

E

F

			Brass	Sn-plated
			PA66	UL 94V-0, COLOR:BEIGE
ITEM		MA		FINISH

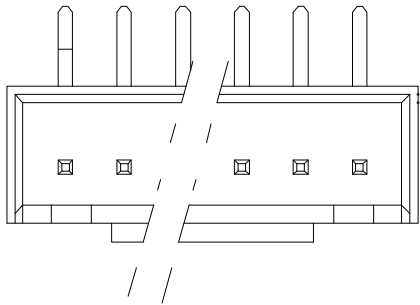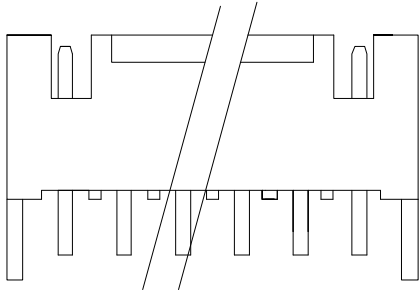

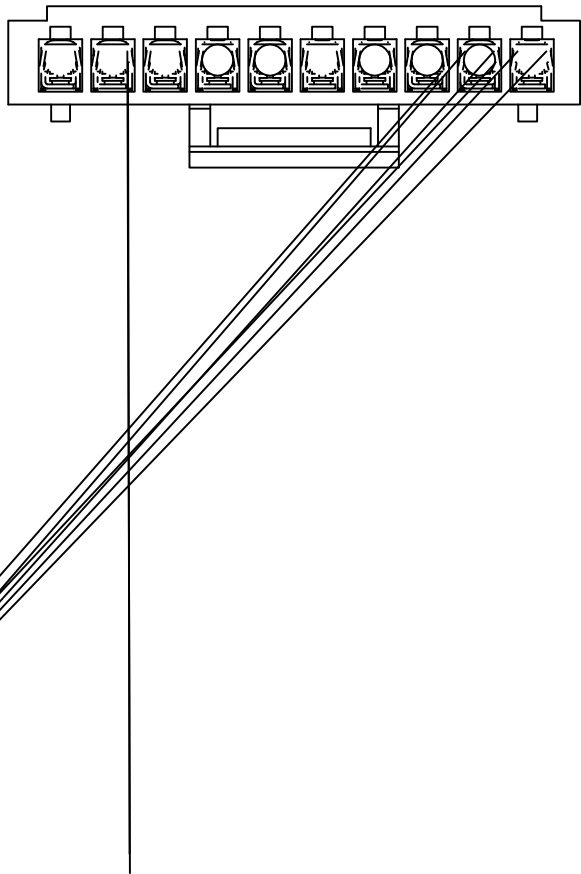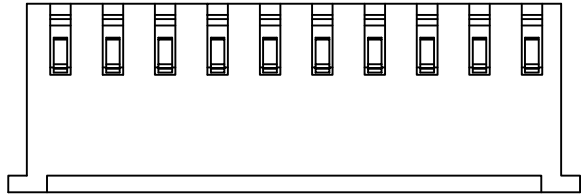

C					
B					
A	PEDESTAL		1 PCS	PA66	COLOR:WHITT
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH

