Specifications:

Poles:02~10
Contact resistance:≤20mΩ
Insulation resistance:≥100MΩ
Rated voltage:50V AC DC
Rated current:2.0A AC DC
Withstand Voltage: 500V AC/minute
Temperature Range:−25°C～ +85°C
Housing:PA9T UL94V−0, Black
Contacts: Phosphor Bronze Matte Sn/Gold
Solder Tabs:Brass Matte Sn

ORDER INFORMATION:

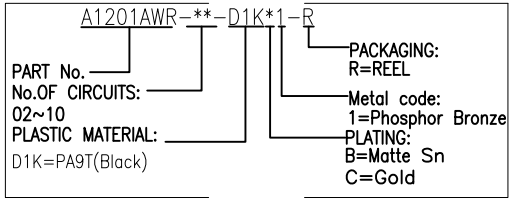

GENERAL TOLERANCE	USE:	PART NO.:
	APPD:	DWG N
	CHKD:	
UNITS: mm	DR:	SCALE / SHEET

Specifications:

Contact resistance:≤20mΩ

Insulation resistance:≥100MΩ

Rated volta

ORDER INFORMATION: