Specifications:

Contact resistance:≤20mΩ

Insulation resistance:≥100MΩ

Rated voltage:125V AC D

ORDER INFORMATION:

ORDER INFORMATION:

A1251AWV-**-F1CA-R-X

PART No.
No.OF CIRCUITS:
**
PLASTIC MATERIAL:
F1C=LCP(NATURAL)
PLATING:
PACKAGING:
R=REEL
P=PE

GENERAL TOLERANCE USE

| | | | | |
|---|---|---|---|---|
| | | | | |
| | | | | UL 94V-0, COLOR:B |
| | | | | |

| ITEM | COMPONENT | | Q'TY | MATERIAL | FINISH |
|---|---|---|---|---|---|
| C | | | | | |
| B | CONTACT | | 4 PCS | Brass | Sn-plated |
| A | PEDESTAL | | 1 PCS | LCP | UL 94V-0, COLOR:BEIGE |

USE:

APPD:

CHKD:

DR:

UNITS: mm

TITLE:

PART NO.:

DWG NO.:

SCALE

SHEET

| | | | | |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | P | Sn-plated |
| ITEM | | | | FINISH |

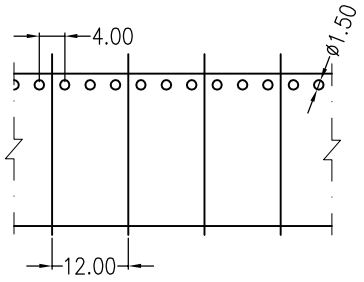


02~09 CONTACTS

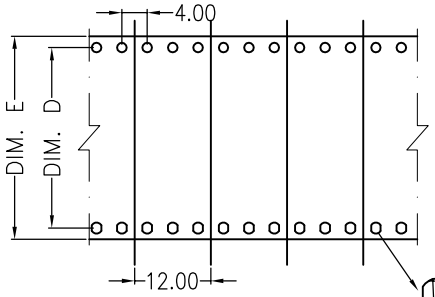


10~16 CONTACTS

待
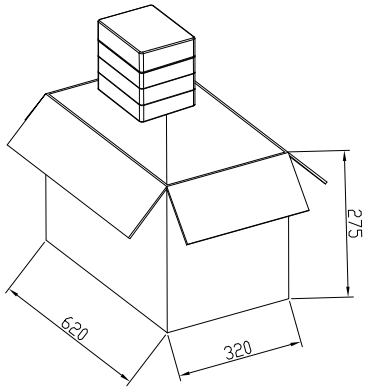
将**袋放入小包裹